



Multi-Purpose Centrifuge for the Dairy Industry







Multi-Purpose Centrifuge SuperVario N

Gerber-Centrifuge up to 36 Butyrometers, Babcock fat determination, Röse-Gottlieb fat determination* and solubility index determination (ATPI)

*Pay attention to existing safety rules!

Features:

■ Easy Handling:

5 selectable modes for centrifugation

(Gerber test, Röse-Gottlieb, Babcock, Solubillity and Free Mode) Free Set-up (Free Mode) of

- 1. Speed/RCA** (adjustable from 600 to 1200 rpm, the corrosponding RCA is shown simultaneously) **RCA = Relative Centrifugal Acceleration
- 2. Temperature (adjustable from amb. temp. to 68°C)
- **3. Centrifugation time** (adjustable from 1 to 99 minutes)
- Centrifugation drum of strainless steel
- Security lid locking device
- Automatic unbalance switch off
- Electrical brake


Technical Specification:

230V/50...60 Hz/1200 VA Connection:

Weight (empty): 26 kg Full height: 460 mm Operation height: 370 mm

Speed range: 600...1200 UpM

Amb. temperature to 68°C Temperature range:

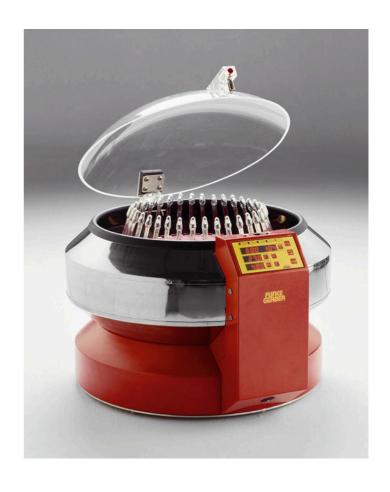

Order Data:

Name	Art. No.
Centrifuge SuperVario-N (without heads)	3680

Accessories:

Name		Art. No.
A STANDARD OF STAN	Head A (up to 36 Butyrometer/up to 18 Babcock-bottles)	3685
	Butyrometer-bucket of cast aluminium	3631
	Babcock-bucket	3632
B	Head B (Protective drum for 8 Mojonnier tubes)	3686
C	Head C (up to 6 solubility index tubes)	3687
	Solubility index tube bucket	3633



Postbus 2151 8203 AD Lelystad Tel: 0320-266171

Pascallaan 9 8218 NJ Lelystad Fax: 0320-257354 email: laboratorium@dijkstra.net www.dijkstra.net